




## SKY900 - 900W Air-Cooled Transmitter

### Key Features

- **Extraordinary power headroom for high reliability**  
The JM 900W air cooled transmitter is designed to deliver reliable, long term operation with superior MER performance. Enough headroom above operating power is resulting in extraordinary MTBF.
- **Best-in-class ProTelevision modulator**
- **Wideband Doherty Amplifier for maximum efficiency**
- **High MTBF DC fans and front panel replaceable power supplies reduce cost of ownership.**
- **Fast VSWR shutdown makes the JM transmitter unconditionally safe at any phase angle and power level**
- **Superior MER performance (35dB) improves reception**
- **High performance Digital Linear & Nonlinear Auto-correction**
- **Complete SFN packages and support available**
- **Seamless input source changeover (2 ASI & 2 TSoIP – 3.0 STL on ethernet)**
- **Custom systems configurations available**  
JM can produce and supply customized transmitter tailored to your needs and circumstances. In addition to the external design and size of the transmitter, custom software is available from JM, where we have dedicated full time software engineers on staff. Other custom adaptations can meet your special requirements.
- **ATSC 1.0, ATSC 3.0, DVB-T2, ISDB-T, DMB are selectable with appropriate software license**
- **All metering remotely available**
- **LDM capable**
- **User-friendly Web GUI & SNMP control**
- **Deep Logging for Root Cause Analysis and trending**  
The number of event logging is large, it is easy to understand the state of the equipment and it is easy to solve the problem because it is possible to identify the specific cause when a problem occurs.
- **Cool and quiet operation**

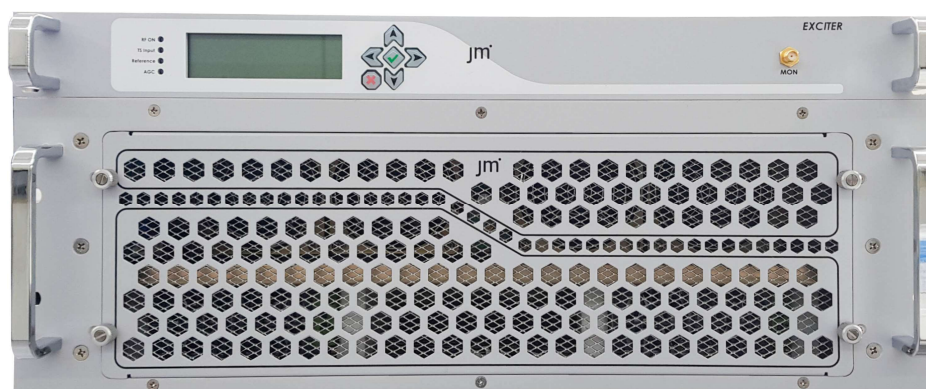

900W Air Cooled DTV Transmitter  
(483 x 198.5 x 631mm)

## Specifications in brief

Description	Specifications	
<b>General</b>		
Transmit frequency band	Designated channel between 470 ~ 810MHz	
AC input	220V <sub>AC</sub> ± 10%, 1Phase, 50/60Hz	
Operating temperature	-10°C ~ +45°C	
Permissible relative air humidity	≤ 85%	
Max altitude	2,500m a.s.l.	
Dimensions	19" standard rack mount type FEU (482.8 x 43.7 x 510mm) & 800W HPA (482.8 x 154.8 x 631mm)	
Cooling system	Forced air cooling	
The number of HPA	1	
HPA output power	900W	
Data input	2 ASI, 2 TSoIP (ATSC 3.0 STL on ethernet)	
GPS Ant input connector	TNC-female	
Data input connector	BNC-female & RJ45	
RF output impedance	50Ω	
RF output connector	DIN 7/16" female (7/8" EIA Flange, 1-5/8" EIA Flange optional)	
Remote/Alarm	RJ-45 / 25PIN D-SUB	
<b>Performance</b>		
Output power	900W before Mask Filter	
Frequency stability	GPS	
Spurious & Harmonics	≤ -60dBc	
Power stability	≤ ±5%	
MER	≥ 35dB	
Frequency response	≤ ±0.5dB	
Total system AC power consumption (post mask filter)	2.5kW	
Crest factor	8 ~ 20dB	
Output VSWR	≤ 1.15	
<b>Digital Modulation</b>		
ATSC3.0	ref. standards	ATSC A/322, 324, 331
	RF bandwidth	6MHz
DVB-T	ref. standards	ETS 300 744 / EL 50083-9 / TR 101 190 / TR 101 891
	RF bandwidth	6MHz, 7MHz, 8MHz
DVB-T2	ref. standards	EN 302 755, TS 102 831, T2-MI
	Streams	Single stream with System A or Multiple PLP with System B
	RF bandwidth	6MHz, 7MHz, 8MHz
ISDB-T	ref. standards	ABNT NBR 15601 - ARBI STD B31
	Multiple segment operation	Total 13 segments, distributed over the existing layers (1seg supported)
	RF bandwidth	6MHz
ATSC 8VSB	Standards	
	Modulation mode	8VSB
	Channel spacing	6MHz
DAB/DMB	ref. standards	TS 102 428, ETSI300401 Ref.TTASKO-07.0024
	RF bandwidth	1.536MHz Block